

INDUSTRIAL + COMMERCIAL

Landis+Gyr Dialog

ZMD310AT/CT

TECHNICAL DATA



General

Voltage

Nominal Voltage U_n ZMD310xT	3 x 110/190–133/230 V 3 x 220/380–240/415 V
--------------------------------	--

Voltage Range	80–115% U_n
---------------	---------------

Frequency

Nominal Frequency f_n	50 or 60 Hz
tolerance	± 2%

IEC-specific data

Current

Base Current I_b	selectable 5, 10, 20, 40 A
--------------------	----------------------------

Maximal Current I_{max}

metrological	selectable 40, 60, 80, 100, 120 A
thermal	120 A

Short Circuit ≤ 10 ms	5000 A
-----------------------	--------

Measurement Accuracy

active energy to IEC 62053-21	class 1
reactive energy to IEC 62053-23	class 1

Measurement Behaviour

Starting Current ZxD310xT

according to IEC	0.4% I_n
typical	0.3% I_n

The startup of the meter is controlled by the starting power and not by the starting current.

Starting Power in M-Circuit	single phase nominal power x starting current
-----------------------------	--

MID-specific data

Current (for Class B)

Minimum Current I_{min}	0.25, 0.5, 0.75, 1.0 A
---------------------------	------------------------

Transitional Current I_{tr}	0.5, 1.0, 1.5, 2.0 A
-------------------------------	----------------------

Maximum Current I_{max}	120 A
---------------------------	-------

Measurement Accuracy

ZMD300AT/CT; to EN 50470-3	Class B
----------------------------	---------

Measurement Behaviour

Starting Current I_{st}	0.02, 0.04, 0.06, 0.08 A
---------------------------	--------------------------

General

Operating Behaviour

Voltage Failure (Power Down)	
bridging time according to IEC	0.5 s
data storage	after another 0.2 s
switch off	after approx. 2.5 s

Voltage Restoration (Power Up)		
function standby 3 phases		after 2 s
function standby 1 phase		after 5 s
detection of energy direction + phase voltage		after 2 to 3 s

Power Consumption

Power Consumption per Phase in Voltage Circuit		
phase voltage	110 V	240 V
active power (typical)	0.6 W	1.1 W
apparent power (typical)	0.8 VA	1.5 VA

Power Consumption per Phase in Current Circuit		
phase current		10 A
apparent power (typical)		0.03 VA

Environmental Influences

Temperature Range		to IEC 62052-11
operation		-25 °C to +70 °C
storage		-40 °C to +85 °C

Temperature Coefficient	
range	-25 °C to +70 °C
average value (typical)	± 0.012% per K
at $\cos\varphi=1$ (from 0.05 Ib to I_{max})	± 0.02% per K
at $\cos\varphi=0.5$ (from 0.1 Ib to I_{max})	± 0.03% per K

Impermeability according to IEC 60529	IP51
--	------

Electromagnetic Compatibility

Electrostatic Discharges		to IEC 61000-4-2
contact discharge		15 kV

Electromagnetic RF Fields		to IEC 61000-4-3
80 MHz – 2 GHz		10 and 30 V/m


Radio Interference Suppression		
according to IEC/CISPR 22		class B

Fast Transient Burst Test		to IEC 61000-4-4
current and voltage circuits not under load		4 kV
current and voltage circuits under load		
according to IEC 62053-21/22/23		2 kV
auxiliary circuits > 40 V		1 kV

Fast Transient Surge Test		to IEC 61000-4-5
current and voltage circuits		4 kV
auxiliary circuits > 40 V		1 kV

Insulation Strength

Insulation Strength	4 kV @ 50 Hz during 1 min
----------------------------	---------------------------

Impulse Voltage 1.2/50µs		to IEC 62052-11
current and voltage circuits		8 kV
auxiliary circuits		6 kV
Protection Class II according to IEC 62052-11		

Calendar Clock

Calendar Type	Gregorian or Persian (Jalaali)
----------------------	--------------------------------

Accuracy	< 5 ppm
-----------------	---------

Backup Time (Power Reserve)	
with supercap	> 20 days
loading time for max. backup time	300 h
with battery (optional)	10 years
battery type	CR-P2

Display

Characteristics	
type	LCD liquid crystal display
digit size in value field	8 mm
number of positions in value field	up to 8
digit size in index field	6 mm
number of positions in index field	up to 8

Inputs and Outputs

Control Inputs	
control voltage U_s	100–240 V AC
input current	< 2 mA ohmic at 230 V AC

Output Contacts	
type	solid state relay
voltage	12–240 V AC/DC
max. current	100 mA
max. pulse frequency (pulse length 20 ms)	25 Hz

Optical Test Output		Active and Reactive Energy
type		red LED
number		2
meter constant		selectable

Communication Interfaces

Optical Interface		according to IEC 62056-21
type		serial, bidirectional, half duplex
max. bit rate		9600 bps
protocols		IEC 62056-21 and dlms

Communication Units

Exchangeable communication units for various applications.

Additional Power Supply (optional)

On Extension Board 045x

nominal voltage range	100–240 V AC/DC
tolerance	80–115% U_n
frequency	50 or 60 Hz
max. power consumption	6.8 W

On Extension Board 046x

nominal voltage range	12–24 VDC
tolerance	80–115% U_n
max. power consumption	3.5 W

Ripple Control Receiver (optional)

On Extension Board 043x or 003x

Same functionality as RCR161.

All established RCR systems e.g. Semagyr, Ricontic, Decabit, Double Decabit, K22/Z22 are supported.

Code length, pulse length and pulse position can be parameterised.

Electrical Data

nominal voltage	58 or 230 V
frequency	50 or 60 Hz

Filter Values (parameterisable)

functional voltage U_f	0.3–2.5% U_n
control frequency f_s	110–2000 Hz
bandwidth	0.6–6% f_s

Weight and Dimensions

Weight	approx. 1.5 kg
--------	----------------

External Dimensions

width	177 mm
height (with short terminal cover)	244 mm
height (with standard terminal cover)	281.5 mm
height (with extended hook)	305.5 mm
depth	75 mm

Suspension Triangle

height (with extended hook)	230 mm
height (suspension eyelet open)	206 mm
height (suspension eyelet covered)	190 mm
width	150 mm

Terminal Cover

short	no free space
standard	40 mm free space
long	60 mm free space
GSM	60 mm free space
ZxB-type 80 mm	80 mm free space
ZxB-type 110 mm	110 mm free space
ADP1 adapter	
RCR/FTY adapter	


Connections

Phase Connections


type	screw type terminals
diameter for $I_{max} \leq 80$ A	8.5 mm
diameter for position > 80 A	9.5 mm
minimal conductor cross section	4 mm ²
max. cross section cable	35 mm ² (up to 120 A)
max. cross section strand	25 mm ² (up to 80 A)
screw head	Pozidrive Combi No. 2
screw dimension	M6 x 14
max. screw head diameter	≤ 6.6 mm
tightening torque	< 3 Nm

Other Connections


type	screwless spring-type terminal
max. current of voltage outputs	1 A
max. voltage of inputs	250 V

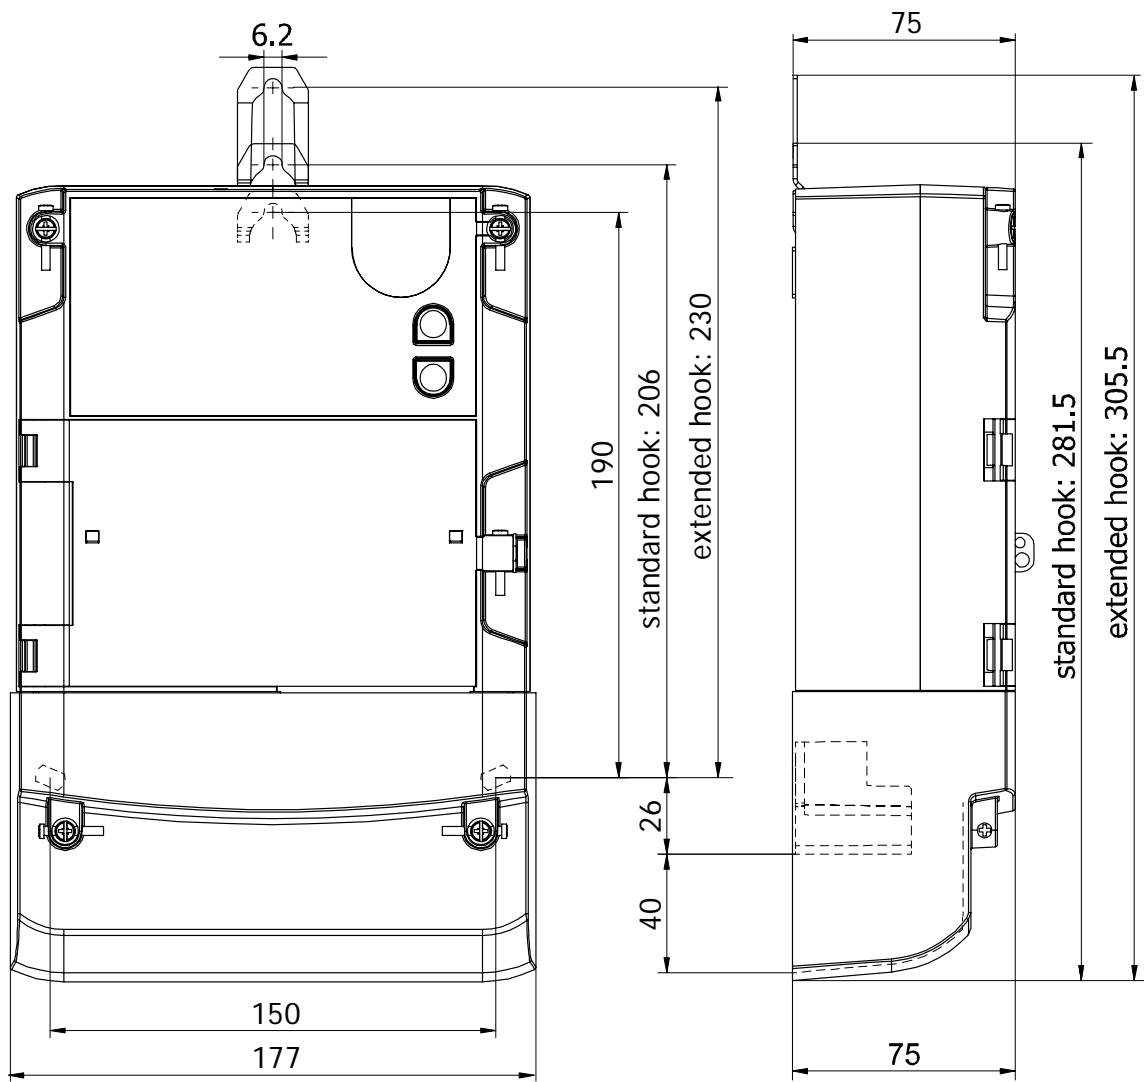

Terminal Layout

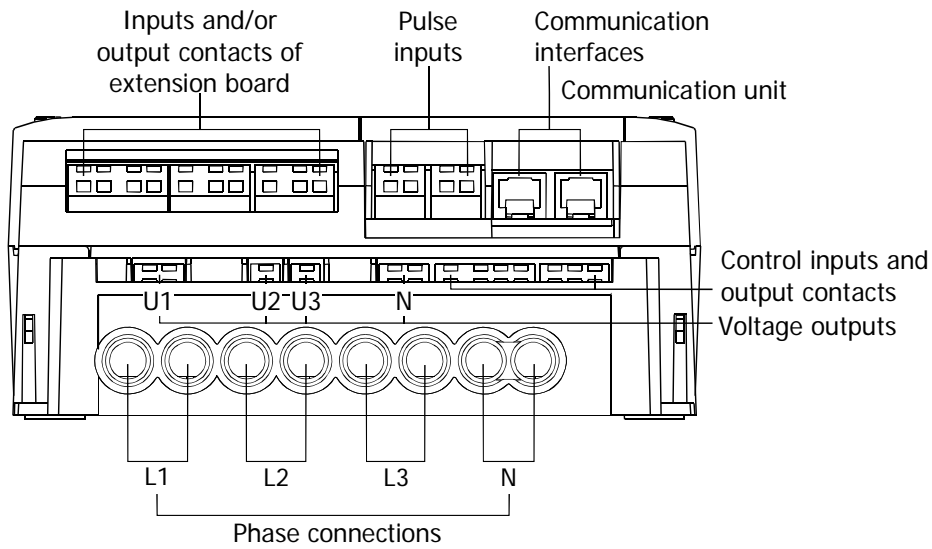

Terminal Dimensions

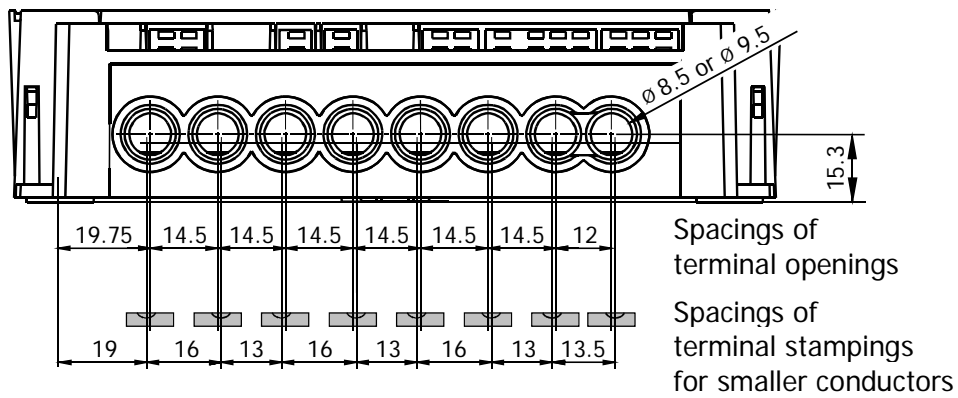

Material

Housing

The meter housing is made of polycarbonate which is partly glass-fibre reinforced.

Type designation ZMD 3 10 C T 44 4207

Network Type

ZFD 3-phase 3 wire network (F-circuit)
ZMD 3-phase 4 wire network (M-circuit)

Connection Type

3: Direct connection
4: Transformer operated

Accuracy Class

10: Active energy class 1 (IEC), B (MID)

Measured Quantities

C: Active and reactive energy
A: Active energy

Construction

T: With exchangeable communication units

Tariffication

21: Energy rates, external rate control via control inputs
24: Energy rates, internal rate control via time switch
(additionally possible via control inputs)
41: Energy and demand rates, external rate control via control inputs
44: Energy and demand rates, internal rate control via time switch
(additionally possible via control inputs)

All versions with 3 control inputs and 2 output contacts

Additional functions

060x 6 outputs
240x 2 control inputs, 4 outputs
420x 4 control inputs, 2 outputs
003x integrated ripple control receiver
043x 4 outputs, integrated ripple control receiver
045x 4 outputs, additional power supply 100–240 VAC
046x 4 outputs, additional power supply 12–24 VDC

xxx0 no additional functions
xxx2 DC-magnet-detection
xxx7 load profile
xxx9 DC-magnet-detection and load profile

Subject to change without notice.

Landis+Gyr Ltd.

Feldstrasse 1
CH-6301 Zug
Switzerland
Phone: +41 41 935 6000
www.landisgyr.com

